

**Description**

PSTN line communicator that allows to extend the communication functions of the central unit: send alarms, notify faults or any other status of the central unit, through voice messages stored in the central unit itself (Loquendo 4299 license necessary).

Linking to the 4241 4G communicator it can work as preferential communication channel, 4G back-up or in parallel managing two calls (one on PSTN and the other on G4 module). You can also manage your system by telephoning the central unit: a guided voice menu allows you to activate scenarios, exclude or include zones and activate or deactivate outputs.

Finally, it allows you to connect the burglar-alarm system with the security centres: alarm signals can be sent via the Contact ID or SIA protocol. In case of alarm, the device is capable of forwarding the notification by disconnecting all the other devices that use the telephone line.

Various programmable options: check the presence of the telephone line and protection against wire cutting, enabling the responder function with a certain number of rings and jump the responder to allow the connection of other devices.

Clip-on installation on the central unit board through on-board connector. Connection to the telephone line through the RJ-11 standard connector.

**NOTE:** The PSTN communication module must be the first element of the internal telephone system: therefore, it must be connected before any other devices (telephone, fax, or answering machine).

**Technical data**

Power supply:	3,3 Vdc from central unit card
Absorption:	10 mA @ 12 Vdc from power supply
Operating temperature:	5 – 40 °C

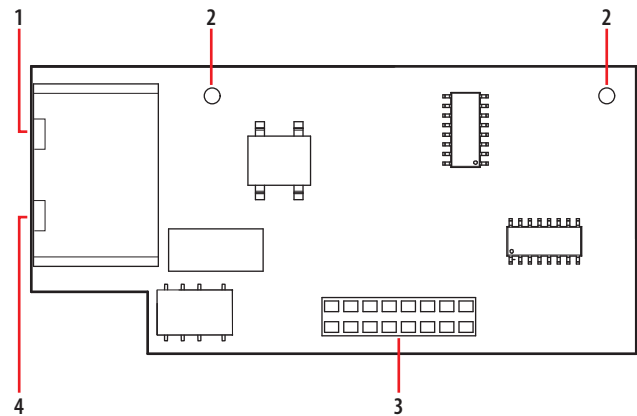
Add-on module with 16-pole connector  
RJ-11 connector

**Standards, certifications, marks**

Europe: CE, RoHS  
Italy: EN 50136 Index 3 - Class II T031:2017  
EN 50131-3 EN50136-2 (SP2)  
INDEX 2, CLASS 2

**Dimensional data**

H 80 mm, L 38 mm, D 16 mm.

**Front view****Legend**

1. Telephone line connector - LINE
2. Fixing holes (use columns supplied)
3. Central connector
4. Telephone line connector - TEL